

# BAJEI SDR Device Setup

## Basic Guide

1. Switch on the ON OFF button



2. Press the tuner and hold it




3. Hold the tuner and spin for the adjustment setting




## Interface Adjustment

1. Adjust the highlight to **72,000,000Hz** (72 MHz), which corresponds to one of emGuarde's harmonic frequencies

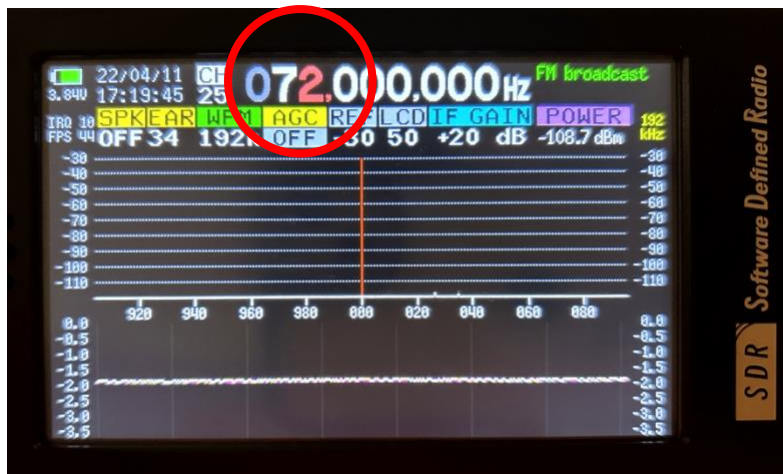

2. Adjust the highlight to the section shown in the image below and switch the setting to 'STE 192k'

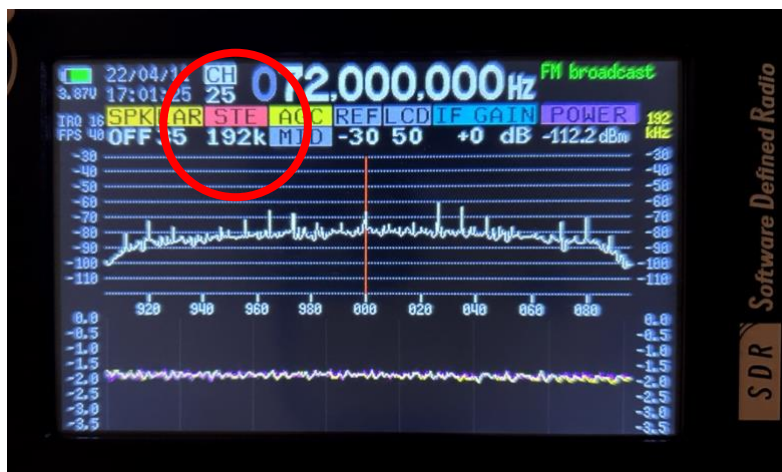

3. Adjust the highlight to the section shown in the image below (AGC) and switch the setting to 'AGC-MID'



4. Adjust the highlight to the section shown in the image below (REF) and switch the setting to '-30'




5. Adjust the highlight to the section shown in the image below (IF GAIN) and switch the setting to '+0 dB'



6. Adjust the highlight to the section shown in the image below and switch the setting to '-10, 0KHz, 10'




6. Adjust the highlight to the section shown in the image below and switch the setting the example below.

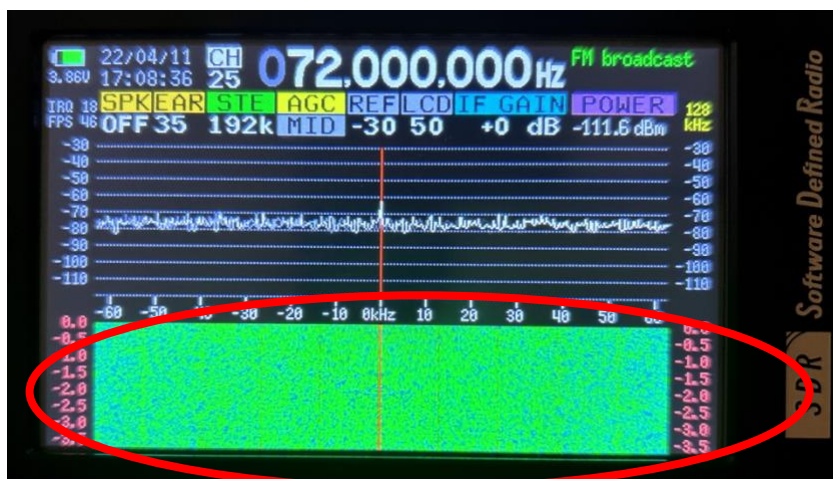




## Install antenna

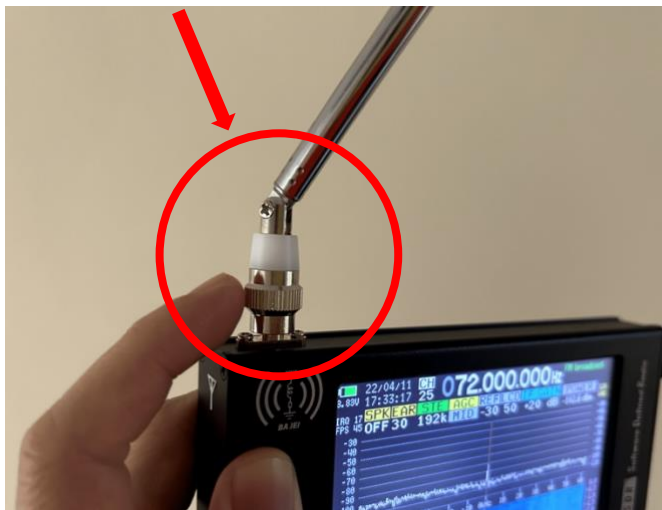

## Before emGuarde turn ON

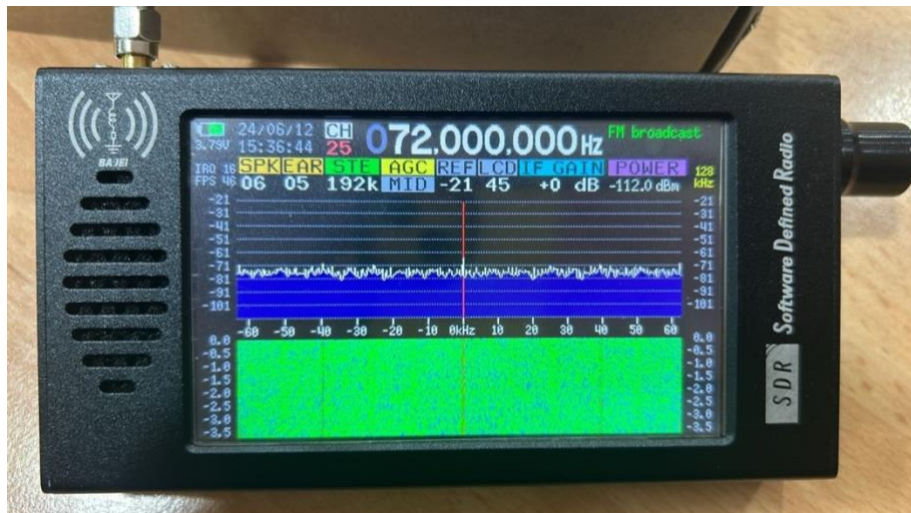

## After emGuarde turn ON

